LACAVA


FLUTTI
built-in thermostatic valve
with volume valve
16PBP1.P...



16PBP1.P.S	smooth handle, smooth plate
16PBP1.P.SF	smooth handle, fluted plate
16PBP1.PF.S	fluted handle, smooth plate
16PBP1.PF.SF	fluted handle, fluted plate

Specifications:

Installation:	built-in wall mount
Exterior Dimensions:	W: 5 1/8" H: 7 1/4"
Material:	Solid brass construction with progressive ceramic cartridge and 1-way diverter cartridge
Water use:	4.2 GPM (43.5 PSI)
Finishes:	PS - polished brass, PN - polished nickel, 51 - brushed brass, CR - polished chrome, BG - brushed gold, BK - black chrome, PB - polished bronze, GN - gun metal, NI - brushed nickel, TN - titanium, BB - brushed bronze, 44 - matte black
Fittings included:	Rough-in # VPBP1 trim # 16PBP1_2_2S_3_3S.P.S-A smooth handle and backplate or 16PBP1_2_2S_3_3S.P.SF-A smooth handle, fluted backplate or 16PBP1_2_2S_3_3S.PF.S-A fluted handle, smooth backplate or 16PBP1_2_2S_3_3S.PF.SF-A fluted handle and backplate
Tile opening max size:	W: 4" H: 5 3/4"

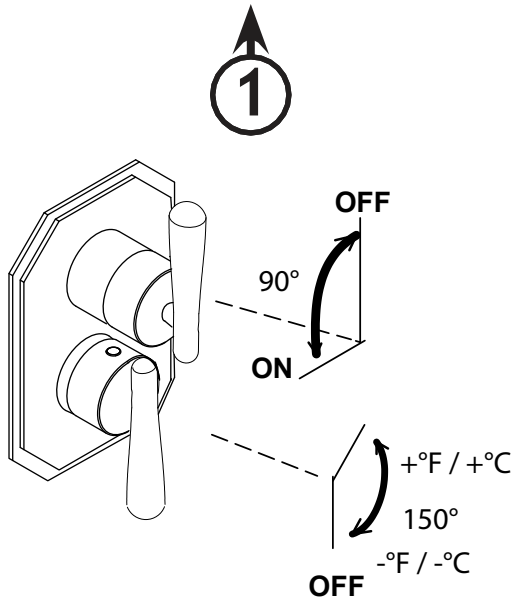

Features:

- unibody pressure balancing progressive valve with 1-way diverter and OFF function
- trims sold separately
- cross handles and rectangular backplate
- 1-way diverter valve with 90° rotating angle
- anti-scald protection & temperature regulation for flow rates as low as 1.75 GPM
- screwdriver service stops
- finished wall must be flush with mudguard as marked
- 1/2" Male NPT inlets & outlets, optional sweat connection
- 1" extension kit available

Codes + Standards:

- Meets and exceeds applicable national codes
  - ASME A112.18.1/CSA B125.1
  - ASSE 1016/ASME A112.1016/CSA B125.16
- CAL-Green compliant

ADA compliant when installed to specific requirements of this regulation

Recommended Items:

- Replacement parts:
  - VPBP1 rough-in
  - 16PBP1_2_2S_3_3S.P.S-A trim with smooth handle and backplate
  - 16PBP1_2_2S_3_3S.P.SF-A trim with smooth handle, fluted backplate
  - 16PBP1_2_2S_3_3S.PF.S-A trim with fluted handle, smooth backplate
  - 16PBP1_2_2S_3_3S.PF.SF-A trim withfluted handle and backplate
  - VPBP-C ceramic cartridge
  - VD1-C- diverter cartridge
  - VPBP1-2-EX 1" extension kit

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale.

Revised: 11/06/26


LACAVA


FLUTTI


built-in pressure balanced progressive mixer
w/1-way outlet

16PBP1.P...

1-WAY
OUTLET A

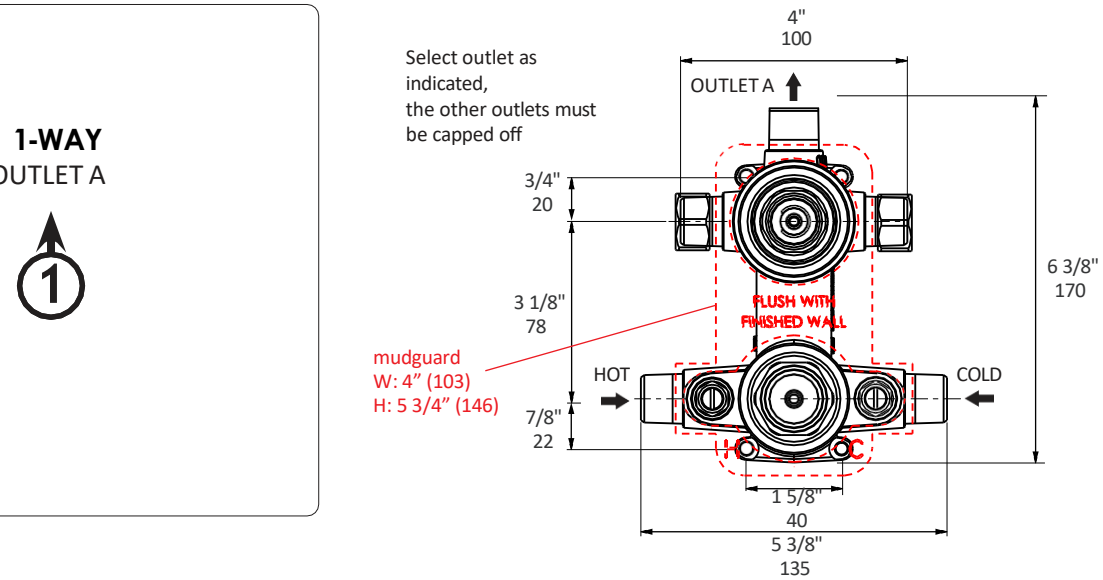

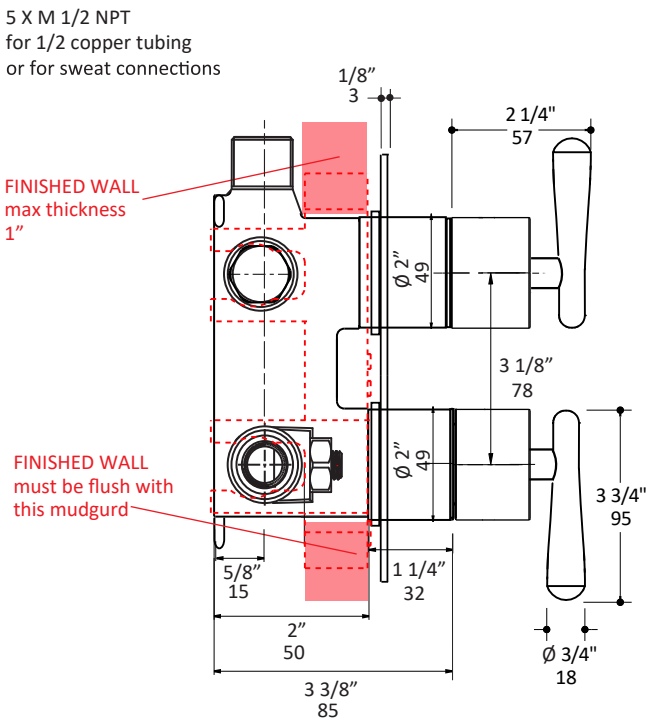

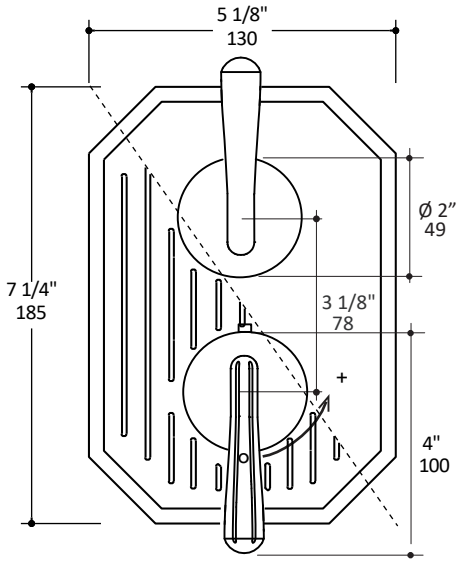

Tile opening max size: 4"W x 5 3/4"H

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale.

Revised: 11/06/26