LACAVA

FLUTTI
built-in thermostatic valve with 2-way diverter

Specifications:

Installation:	built-in wall mount
Exterior Dimensions:	W: 5 1/8" H: 7 1/4"
Material:	solid brass construction with thermostatic cartridge and diverter ceramic cartridge with 2-way out
Water use:	7.1 GPM (43.5 PSI)
Finishes:	CR - polished chrome, PB - polished bronze, PN - polished nickel, GM - gun metal, NI - brushed nickel, 51 - brushed brass, BG - brushed gold, BB - brushed bronze, 44 - matte black, TN - titanium, PS - polished brass, BK - black chrome
Fittings as selected:	#VTH2.1 (non-sharing) + trim #16TH1_2.P.S-A all smooth, or #16TH1_2.P.SF-A fluted plate, or #16TH1_2.PF.S-A fluted handle, or #16TH1_2.PF.SF-A all fluted #VTH2S (sharing) + trim #16TH2S_3_3S.P.S-A all smooth, or #16TH2S_3_3S.P.SF-A fluted plate, or #16TH2S_3_3S.PF.S-A fluted handle, or #16TH2S_3_3S.PF.SF-A all fluted
Tile opening max size:	W: 4 3/8" H: 5 3/4"

NON-SHARING


16TH2.P.S	smooth handle, smooth plate
16TH2.P.SF	smooth handle, fluted plate
16TH2.PF.S	fluted handle, smooth plate
16TH2.PF.SF	fluted handle, fluted plate


SHARING

16TH2S.P.S	smooth handle, smooth plate
16TH2S.P.SF	smooth handle, fluted plate
16TH2S.PF.S	fluted handle, smooth plate
16TH2S.PF.SF	fluted handle, fluted plate

Features:

- Unibody thermostatic valve with 2-way diverter and OFF function
- Trims sold separately
- P- handles and rectangular backplate
- Non-sharing 2-way diverter valve with 180° rotating angle # VTH2.1
- Sharing 2-way diverter valve with 360° rotating angle # VTH2S
- 3/4" NPT water in and 1/2" OUT connections (outlet B and C)
- Anti-scald protection & temperature regulation
- Water temperature set to 100°F
- Screwdriver service stops
- Separate check valves with filters for easy servicing
- Finished wall must be flush with mudguard as marked
- 1 1/8" extension kit available

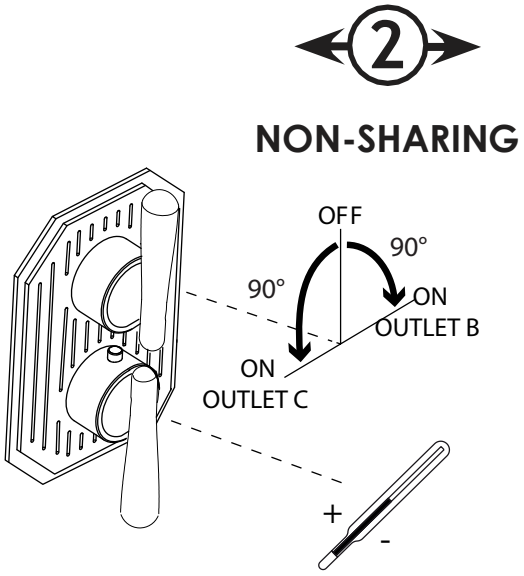

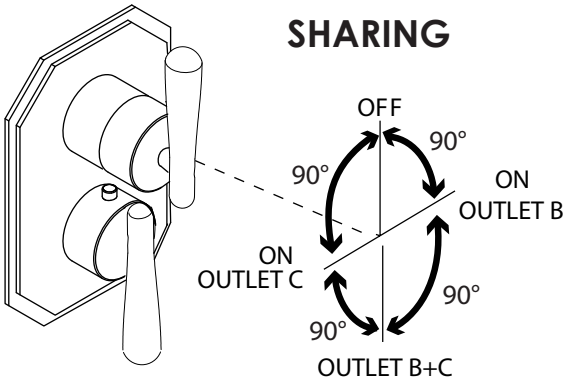

Codes +Standards

- Meets and exceeds applicable national codes and standards
  - ASME A112.18.1/CSA B125.1
  - ASSE 1016/ASME A112.1016/CSA B125.16.
  - CAL-Green compliant (non-sharing valves)

ADA compliant when installed to specific requirements of this regulation

Recommended Items:

- Replacement parts:
  - VD2-C- diverter cartridge, non-sharing
  - VD2S-C- diverter cartridge, sharing
  - R039 thermostatic cartridge
  - VTH1.1-EX 1 1/8" extension kit for non-sharing valve
  - VTH3.1-EX 1 1/8" extension kit for sharing valve

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale.

Revised: 10/26/26

LACAVA

FLUTTI


built-in thermostatic valve with 2-way diverter


NON-SHARING


16TH3.P.S	smooth handle, smooth plate
16TH3.P.SF	smooth handle, fluted plate
16TH3.PF.S	fluted handle, smooth plate
16TH3.PF.SF	fluted handle, fluted plate

SHARING


16TH3S.P.S	smooth handle, smooth plate
16TH3S.P.SF	smooth handle, fluted plate
16TH3S.PF.S	fluted handle, smooth plate
16TH3S.PF.SF	fluted handle, fluted plate

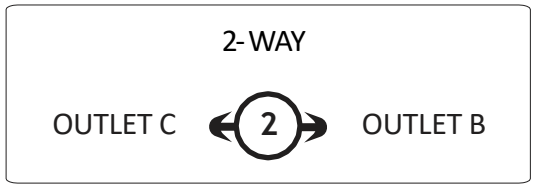

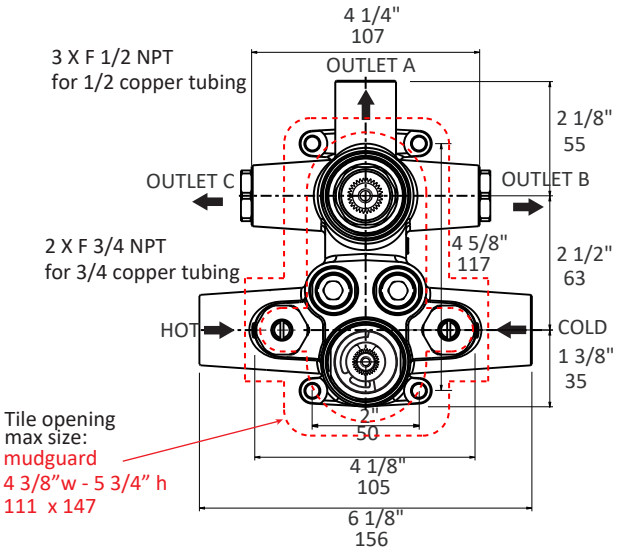


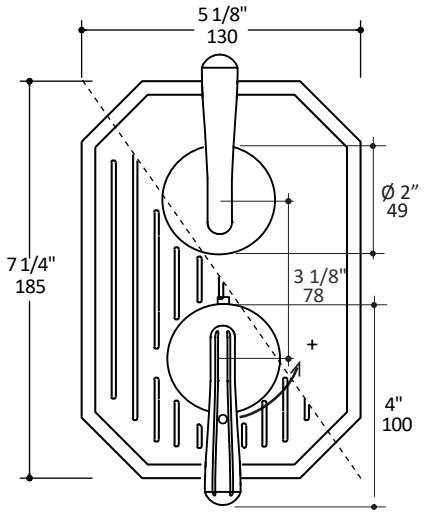

NON-SHARING

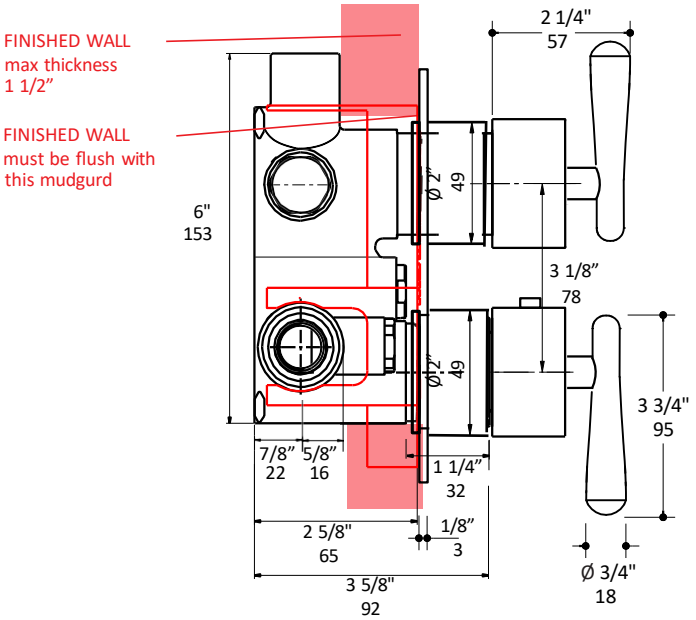

SHARING

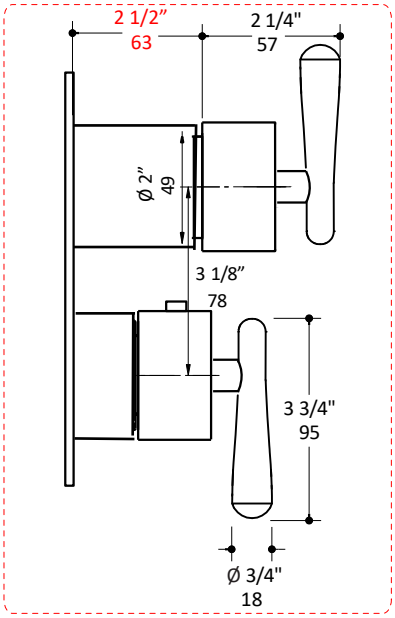

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale.

Revised: 10/26/26