

Specifications:

16TH3.X.S, 16TH3S.X.S
16TH3.X.SF, 16TH3S.X.SF

Installation:	built-in wall mount	
Exterior Dimensions:	W: 5 1/8" H: 7 1/4"	
Material:	solid brass construction with thermostatic cartridge and diverter ceramic cartridge with 2-way out	
Water use:	7.1 GPM (43.5 PSI)	
Finishes:	CR - polished chrome PB - polished bronze PN - polished nickel GM - gun metal NI - brushed nickel 51 - brushed brass BG - brushed gold BB - brushed bronze 44 - matte black TN - titanium PS - polished brass BK - black chrome	
Fittings as selected:	#VTH3.1 (non-sharing) + #16TH2S_3_3S.X.S-A (without flutes) #VTH3.1 (non-sharing) + #16TH2S_3_3S.X.SF-A (with flutes) #VTH3S (sharing) + #16TH2S_3_3S.X.S-A (without flutes) #VTH3S (sharing) + #16TH2S_3_3S.X.SF-A (with flutes)	
Tile opening max size:	W: 4 3/8" H: 5 3/4"	



16TH3.X.SF (non-sharing)
16TH3S.X.SF (sharing)



16TH3.X.S (non-sharing)
16TH3S.X.S (sharing)



Features:

- unibody thermostatic valve with 3-way diverter and OFF function
- trims sold separately
- #16TH2S_3_3S.X.S-A (without flutes) and #16TH2S_3_3S.X.SF-A (with flutes)
- cross handles and rectangular backplate
- non-sharing 3-way diverter valve with 360° rotating angle # VTH3.1
- sharing 3-way diverter valve with 360° rotating angle # VTH3S
- 3/4" NPT water in and 1/2" OUT connections
- anti-scald protection & temperature regulation
- water temperature set to 100°F
- screwdriver service stops
- separate check valves with filters for easy servicing
- finished wall must be flush with mudguard as marked
- 1 1/8" extension kit available

Codes + Standards:

- Meets and exceeds applicable national codes and standards
 - ASME A112.18.1/CSA B125.1
 - ASSE 1016/ASME A112.1016/CSA B125.16
 - CAL-Green compliant (non-sharing valves)



compliant when installed to specific requirements of this regulation


Recommended Items:

- Replacement parts:
 - VD3-C- diverter cartridge, non-sharing
 - VD3S-C- diverter cartridge, sharing
 - R039 thermostatic cartridge
 - VTH3.1-EX 1 1/8" extension kit


LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale.

Revised: 09/01/26

NON-SHARING

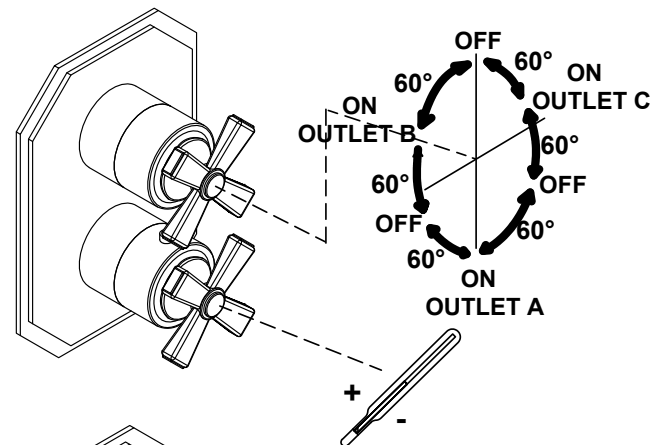

SHARING




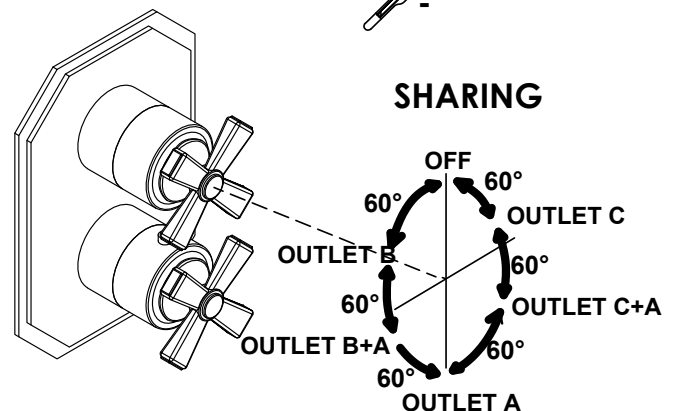


LACAVA

FLUTTI

built-in thermostatic valve with
3-way diverter

16TH3.X.S, 16TH3S.X.S
16TH3.X.SF, 16TH3S.X.SF

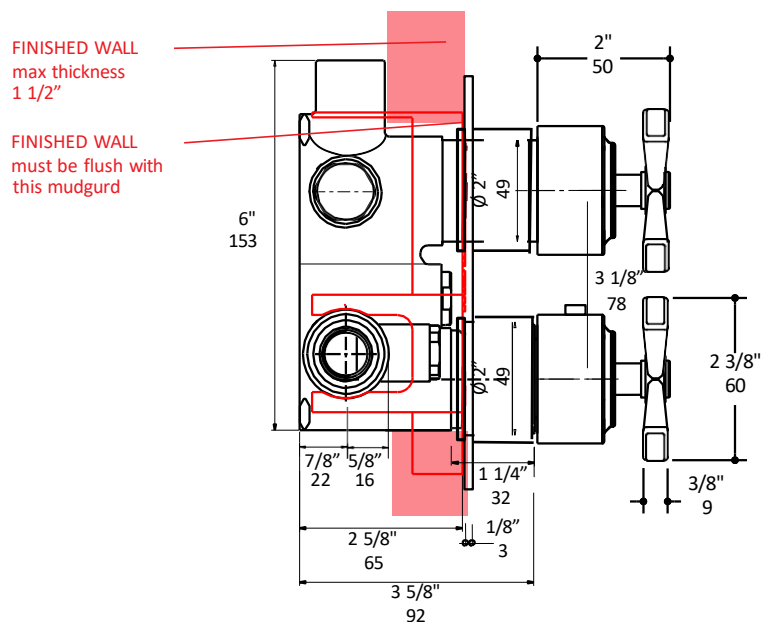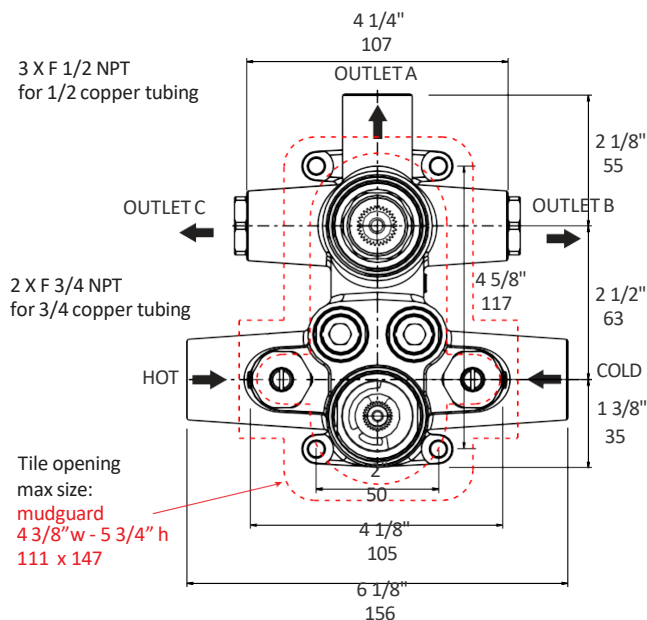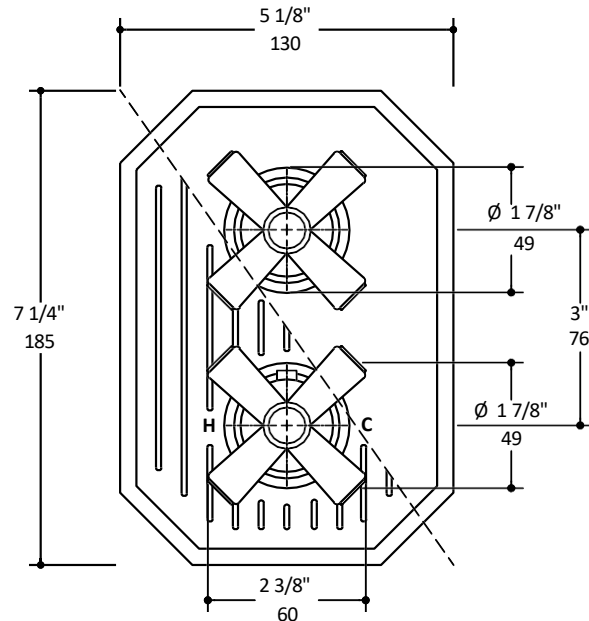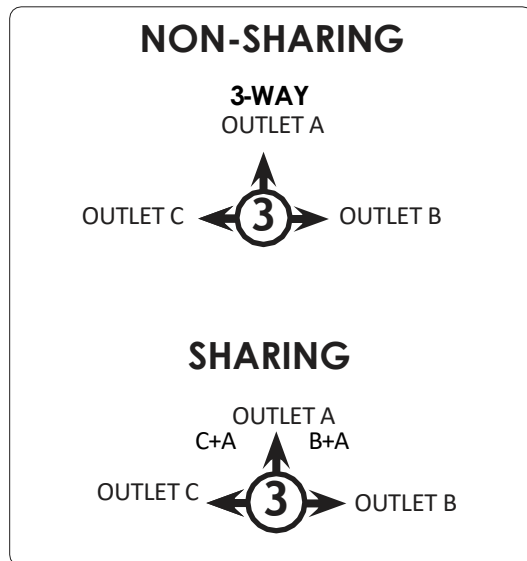

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale.

Revised: 1/16/26