


LACAVA

ZOOM wall-mount soap dispenser EX01A

Specifications:


Installation:	wall-mount 1-hole, touch-free
Exterior Dimensions:	H: 1 3/4" SPOUT: 5"
Material:	solid brass construction spout
Soap volume discharge:	0.07 oz (2mL)/level (4 levels)
Power supply:	AC/DC
Finishes:	CR - polished chrome PN - polished nickel NI - brushed nickel BG - brushed gold 44 - matte black TN - titanium
Cutout Size:	Ø 1 3/8"
Accessories included:	25" pvc pipes with elbows power adapter, large soap bottle #EXBTL, all supply lines and battery box



Features:


- **Touch-free safety from spreading undesirable pathogens**
- **Commercial grade automated fixture**
- Power supply options:
 - AC - transformer with a plug to electricity and/or
 - DC - battery pack for 4 x D alkaline batteries (batteries not included)
 - on average lasts for 75,000 use cycles
- Plastic refillable bottle with 0.5 gal (1.9 L) capacity
- Optional small bottle .21 gal (.8 L) supplied upon request – specify code EXBTS at the time of order
- Liquid soap viscosity: 1000-3500 cps (mpA-s). Not for use with foam soap
- Minimum distance between sensor and surface 10"
- Sensor life expectancy: 500,000 cycles
- No reflective surfaces (mirrors, polished metal finishes, etc) to be placed in th range of the sensor

Codes + Standards:



Recommended Items:

- Replacement parts:
 - #PUMP2 - replacement pump
 - #4DBATPK - replacement battery pack
 - #EXBTL - replacement large soap bottle, .5 gal
 - #EXBTS - replacement small soap bottle, .21 gal
- #EX03A - matching electronic faucet

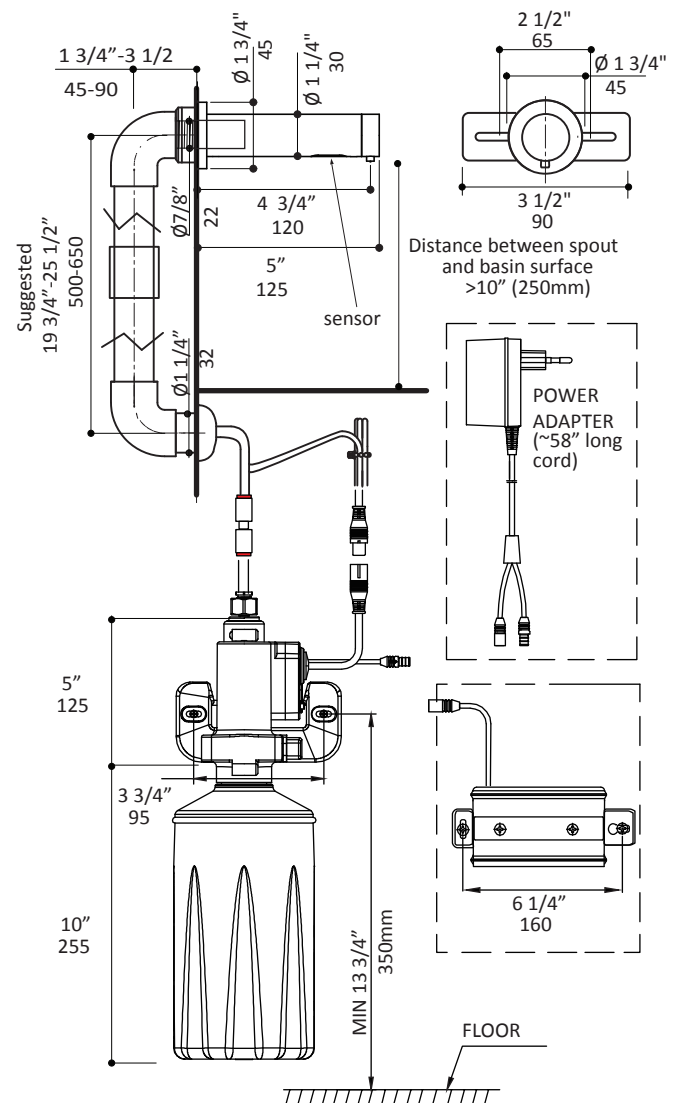

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4\"/>

Revised: 05/31/2024