

Specifications:

Installation:flexible wall mountExterior Dimensions:W: 2 1/8" H: 6 5/8"Material:solid brass construction

Connection IN: $2 \times M \frac{1}{2}$ G **Connection OUT:** $F \frac{1}{2}$ G




Features:

- integrated themostatic valve
- includes built-in filters and check valves
- water flow rate: 6 GPM at 43.5 PSI
- standard water temperature range 68-118°F

Codes + Standards:

 Meets and exceeds applicable national codes and standards including ASSE 1070.

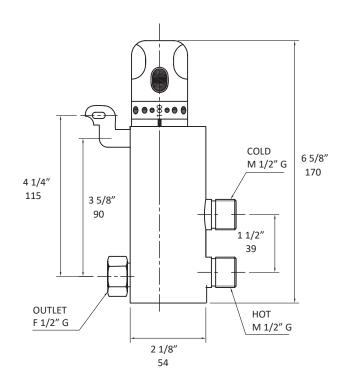

Recommended for Items:

- Wall-mount Zoom faucets: EX03A, EX04A, EX24
- Deck-mount Zoom faucets: EX10A, EX11, EX16, EX18, EX21, EX22
- Replacement part:
 - R039 Vernet thermostatic cartridge

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 03/25/2021