




## Specifications:

Installation: Exterior Dimensions: Material: Water use:	built-in wall mount Ø 2 3/4" solid brass construction ceramic cartridge 10 GPM (43.5 PSI)
Finishes:	per each faucet line
Fittings included:	2-way diverter : rough-in # VD2 3-way diverter : rough-in # VD3
Tile opening max size:	Ø 2 1/2"

# VD2 built-in 2-way diverter VD3 built-in 3-way diverter ALL MODELS







#### Features:

- 2-way diverter valve (e.g. 15D2.L.R) with OFF function 3-way diverter valve (e.g. 15D3.L.R) with OFF function
- square or round backplate
- multiple handles to match the thermostatic valve
- 2-way diverter operating angle 90°, total turning angle 180° (outlet B, and C)
- 3-way diverter operating angle 60°, total turning angle 360° (outlet A, B, and C)
- 1/2" NPT water IN and OUT connections
- 1" extension kit available

## Codes + Standards:

- Meets and exceeds applicable national codes and standards
- CAL-Green compliant





compliant when installed to specific requirements of this regulation

# Recommended Items:

- Replacement parts:
  - VD2 rough-in for 2-way diverter
  - VD3 rough-in for 3-way diverter
  - VD2-C ceramic cartridge for 2-way diverter
  - VD3-C ceramic cartridge for 3-way diverter
  - VD3-EX 1" extension kit

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary. Revised: 1/25/2021

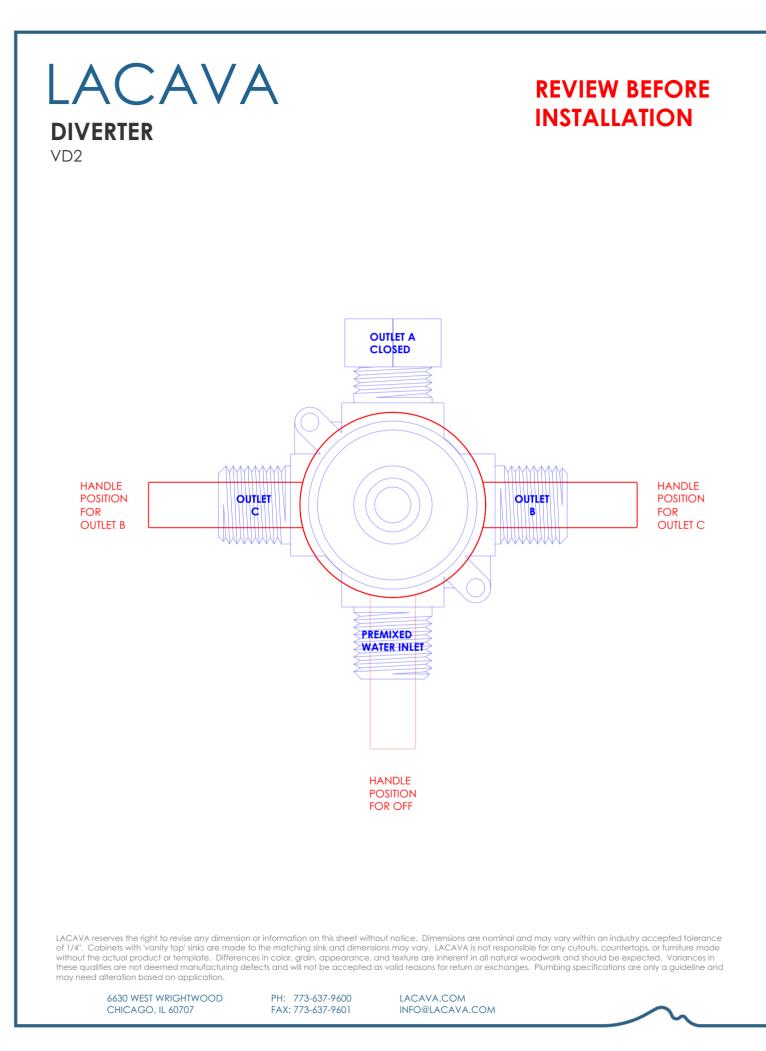

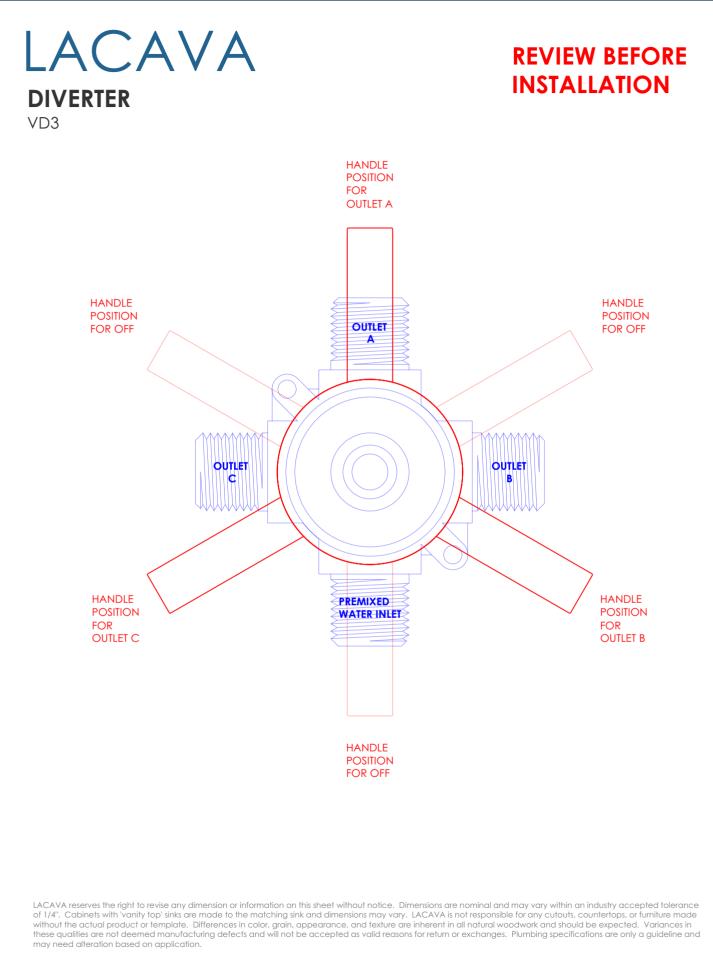

6630 WEST WRIGHTWOOD CHICAGO, IL 60707 PH: 773-637-9600 FAX: 773-637-9601 LACAVA.COM INFO@LACAVA.COM