LACAVA

FLUTTI

built-in pressure balanced progressive mixer w/3-way diverter

NON-SHARING

16PBP3.P.S	smooth handle, smooth plate
16PBP3.P.SF	smooth handle, fluted plate
16PBP3.PF.S	fluted handle, smooth plate
16PBP3.PF.SF	fluted handle, fluted plate

SHARING

16PBP3S.P.S	smooth handle, smooth plate
16PBP3S.P.SF	smooth handle, fluted plate
16PBP3S.PF.S	fluted handle, smooth plate
16PBP3S.PF.SF	fluted handle, fluted plate

Specifications:

Installation: built-in wall mount

Exterior Dimensions: W: 5 1/8" H: 7 1/4"

Material: solid brass construction with progressive ceramic cartridge and 3-way diverter cartridge

Water use: 4.2 GPM (43.5 PSI)

Finishes:

CR - polished chrome	PS - polished brass
BK - black chrome	51 - brushed brass
PN - polished nickel	BG - brushed gold
NI - brushed nickel	PB - polished bronze
TN - titanium	BB - brushed bronze
44 - matte black	GM - gun metal

Fittings included as selected:

VPBP3 - rough-in with non-sharing diverter

VPBP3S - rough-in with sharing dive

16PBP1_2_2S_3_3S.P.S-A trim with smooth handle and backplate

16PBP1_2_2S_3_3S.P.SF-A trim with smooth handle, fluted backplate


16PBP1_2_2S_3_3S.PF.S-A trim with fluted handle, smooth backplate


16PBP1_2_2S_3_3S.PF.SF-A trim with fluted handle and backplate

Tile opening max size: W: 4" H: 5 3/4"

Features:

- unibody pressure balancing progressive valve with 3-way diverter and OFF function
- trim sold separately
- lever handles and rectangular backplate
- non-sharing 3-way diverter valve with 360° rotating angle # VPBP3
- sharing 3-way diverter valve with 360° rotating angle # VPBP3S
- anti-scald protection & temperature regulation for flow rates as low as 1.75 GPM
- screwdriver service stops
- finished wall must be flush with mudguard as marked
- 1/2" Male NPT inlets & outlets, optional sweat connection
- 1" extension kit available

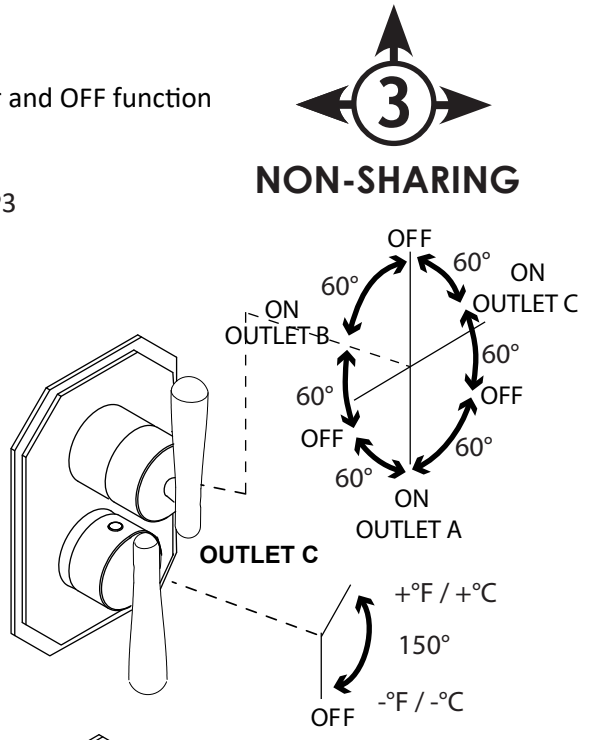

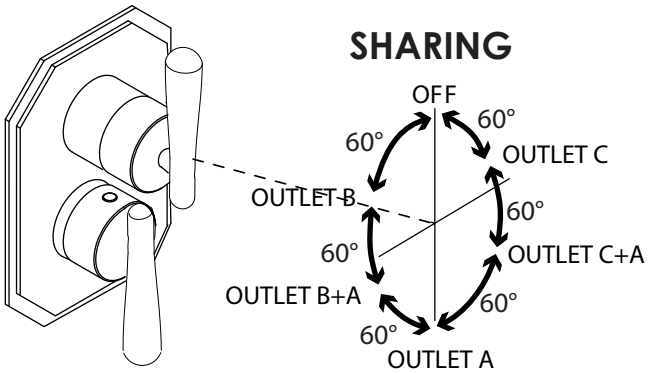

Codes + Standards:

- Meets and exceeds applicable national codes
  - ASME A112.18.1/CSA B125.1
  - ASSE 1016/ASME A112.1016/CSA B125.16
- CAL-Green compliant (non-sharing valves)

ADA compliant when installed to specific requirements of this regulation

Recommended Items:

- Replacement parts:
  - VPBP-C ceramic cartridge
  - VD3-C- diverter cartridge, non-sharing
  - VD3S-C- diverter cartridge, sharing
  - VPBP3-EX 1" extension kit

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 11/13/2026


LACAVA

FLUTTI

built-in pressure balanced progressive mixer
w/3-way diverter


16PBP3.P...


NON-SHARING

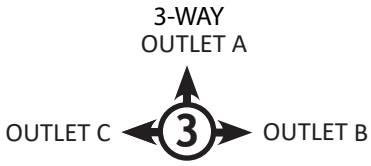


SHARING



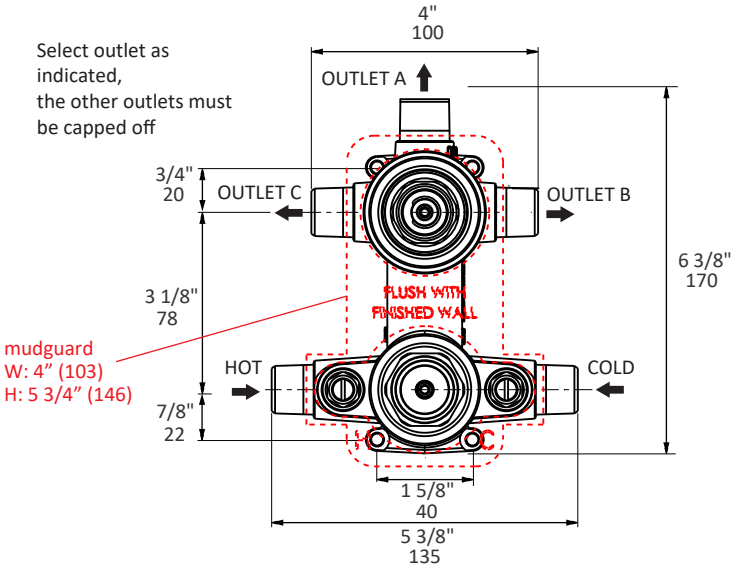

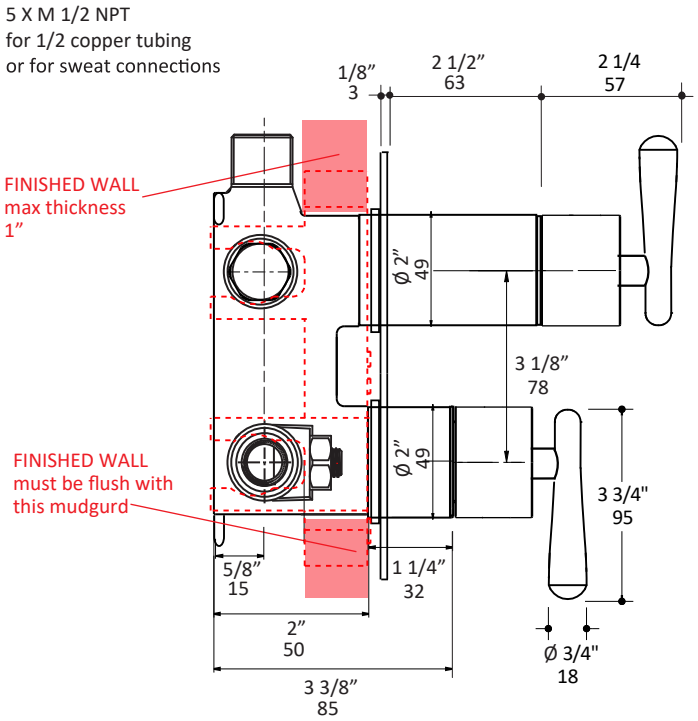

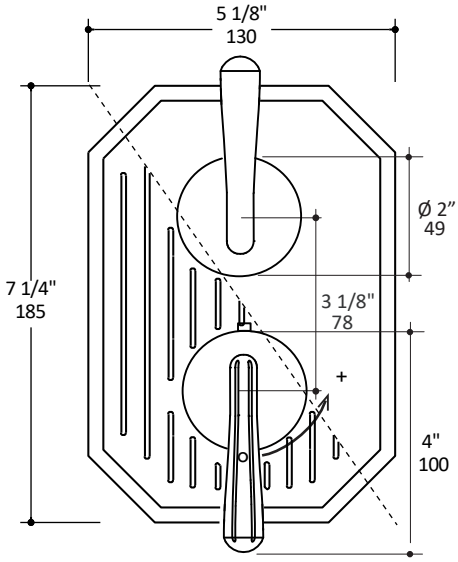

Tile opening max size: 4"W x 5 3/4"H

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4".
Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.
Revised: 11/13/2026